

DFFICE DF THE MARION COUNTY SURVEYOR

SECTION RECORD CORNER

SECTION \_\_\_\_ 25 \_\_TOWNSHIP \_\_\_\_ 15 \_\_\_ RANGE \_\_3 \_\_\_

DATE: \_\_\_\_\_ 6-24-01 \_\_\_\_


PARTY CHIEF: \_\_\_\_ Wilcoxen \_\_\_\_


CREW: \_\_\_\_\_

TYPE DF MARKER: \_\_\_\_ Brass plug found \_\_\_\_

METHOD OF ESTABLISHMENT: \_\_\_ County: 10-1-95

NOTE: This corner position represents a title corner and may not necessarily be in the position of the Record corner.



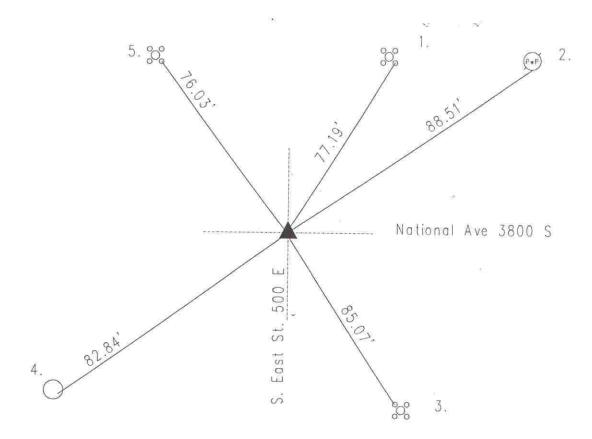

SX532521

| 28232221 |          |   |
|----------|----------|---|
| REF.     | DISTANCE | DESCRIPTION                                   |
| l,       | 77.19'   | Cut 'x' SE-bolt of aluminum pole base         |
| 2.       | 88.51    | PK nail S PwP#42-667 A 10"up                  |
| 3.       | 85.07    | Cut 'x' NW-bolt of aluminum pole base         |
| 4.       | 82.84    | Cut 'x' SE concrete base " Hubler light pole" |
| 5.       | 76.03'   | Cut 'x' SE-bolt of aluminum pole base         |
|          |          |   |
|          |          |   |
|          | 3        | · · · · · · · · · · · · · · · · · · ·         |
|          |          |   |
|          |          | · · · · · · · · · · · · · · · · · · ·         |